

PH302 - Sewer Jet 3000 PSI

Polyhose

APPLICATION

Standard Sewer cleaning vehicles and cleaning equipments.
 Special construction for optimum cut and wear resistance. Bonded tube and cover.
 Available in long lengths with a special cover, resistant to microbiological degradation.
 Lightweight compared to conventional rubber alternatives and increased lifetime.

APPLICABLE STANDARD

Polyhose proprietary product


CONSTRUCTION

Core: Thermoplastic Elastomer
 Reinforcement: 1 or 2 Braids of Synthetic Fibre plus one special extra braid
 Cover: Blue Color - Polyurethane

TEMPERATURE RANGE

-40°C to +60°C

Code	Dash Size	DN	Hose I.D. (Nom.)		Hose O.D. (Nom.)		Working Pressure		Min. Burst Pressure		Min. Bend Radius	
			(In)	(mm)	(In.)	(mm)	(psi)	(Bar)	(psi)	(Bar)	(mm)	(In.)
Part #												
PH302-6	-6	10	3/8	9.6	0.650	16.5	3,000	210	7,500	525	75	3.0
PH302-8	-8	12	1/2	12.8	0.880	22.4	3,000	210	7,500	525	100	4.0
PH302-12	-12	20	3/4	19.2	1.250	31.8	3,000	210	7,500	525	125	5.0
PH302-16	-16	25	1	25.5	1.525	38.7	3,000	210	7,500	525	160	6.4
PH302-20	-20	32	1.1/4	32.0	1.840	46.7	3,000	210	7,500	525	250	10.0

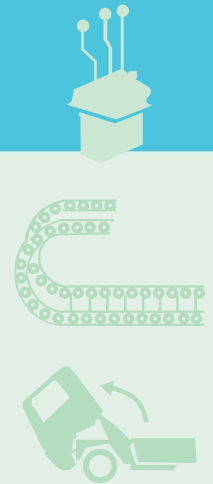

PH303 - Sewer Jet 4000 PSI

APPLICATION

Standard Sewer cleaning vehicles and cleaning equipments.
 Special construction for optimum cut and wear resistance. Bonded tube and cover.
 Available in long lengths with a special cover, resistant to microbiological degradation.
 Lightweight compared to conventional rubber alternatives and increased lifetime.

APPLICABLE STANDARD

Polyhose proprietary product

CONSTRUCTION

Core: Thermoplastic Elastomer
 Reinforcement: 1 or 2 Braids of Synthetic Fiber / Aramid Fibre + 1 special synthetic fiber braid
 Cover: Green Color - Polyurethane

TEMPERATURE RANGE

-40°C to +60°C

Code	Dash Size	DN	Hose I.D. (Nom.)		Hose O.D. (Nom.)		Working Pressure		Min. Burst Pressure		Min. Bend Radius	
			(In)	(mm)	(In.)	(mm)	(psi)	(Bar)	(psi)	(Bar)	(mm)	(In.)
Part #												
PH303-3	-3	5	3/16	4.8	0.405	10.3	4,000	280	12,000	840	40	1.6
PH303-4	-4	6	1/4	6.4	0.500	12.7	4,000	280	12,000	840	40	1.6
PH303-6	-5	10	3/8	9.6	0.670	17.0	4,000	280	12,000	840	75	3.0
PH303-8	-8	12	1/2	12.8	0.920	23.4	4,000	280	12,000	840	75	3.0
PH304-8	-8	12	1/2	12.8	0.800	20.3	4,000	280	16,000	1,120	100	4.0
PH303-12	-12	20	3/4	19.2	1.150	29.2	3,600	250	9,000	625	125	5.0
PH303-16	-16	25	1	25.5	1.500	37.9	3,600	250	9,000	625	160	6.4
PH303-20	-20	32	1.1/4	32.0	1.800	45.7	3,600	250	9,000	625	250	10.0



Polyhose