


CE – 内螺纹公制24°锥带O型圈-轻系列-旋转螺母-45°弯接头

ISO 12151-2-SWE 45° – DKOL 45°



适用软管类型：

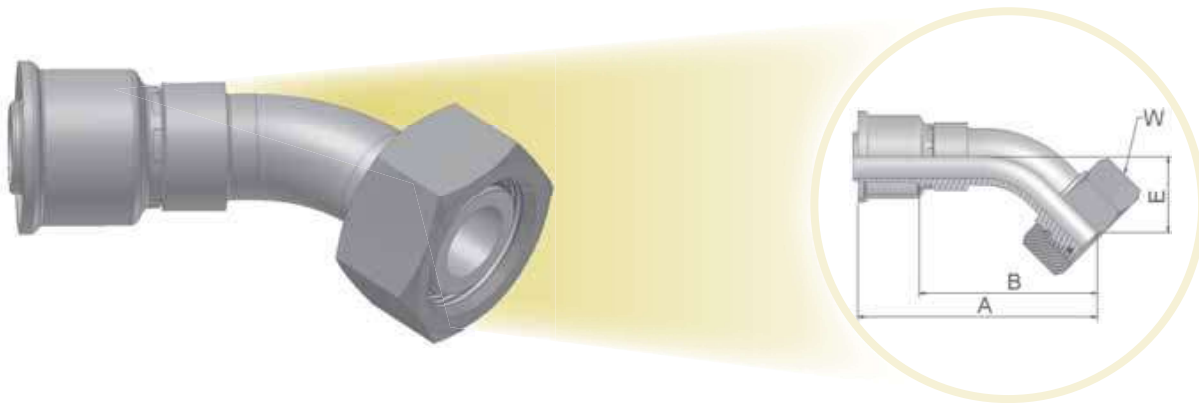

XXXX-XX-XX 型号 26	软管内径			螺纹 公制	钢管 外径	A	B	E	W
	Inch	Size	mm						
1CE26-10-6	5/16	-6	8,0	M16x1,5	10	66	45	18	19
1CE26-12-6	5/16	-6	8,0	M18x1,5	12	66	46	18	22
1CE26-12-8	13/32	-8	10,0	M18x1,5	12	59	39	17	22
1CE26-15-8	13/32	-8	10,0	M22x1,5	15	60	35	17	27
1CE26-18-10	1/2	-10	12,5	M26x1,5	18	69	46	21	32
1CE26-18-12	5/8	-12	16,0	M26x1,5	18	73	50	22	32
1CE26-22-12	5/8	-12	16,0	M30x2	22	77	55	26	36
1CE26-28-16	7/8	-16	22,0	M36x2	28	103	76	33	41
1CE26-35-16	7/8	-16	22,0	M45x2	35	104	75	33	50
1CE26-35-20	1-1/8	-20	29,0	M45x2	35	119	92	36	50
1CE26-35-24	1-3/8	-24	35,0	M45x2	35	128	100	38	50

材料：碳钢，镀锌

标准的软管接头配备了丁腈橡胶(NBR)O型圈，其适用的工作温度为-30°C至+105°C。可根据需要选用特殊O型圈（Viton或EPDM）。O型圈的尺寸和型号详见《O型圈型号表》