
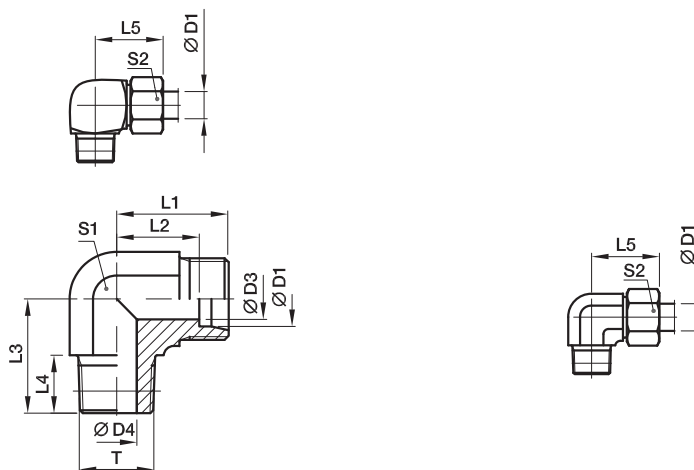


WE-M(KEG) 弯通接头 - 公制锥螺纹

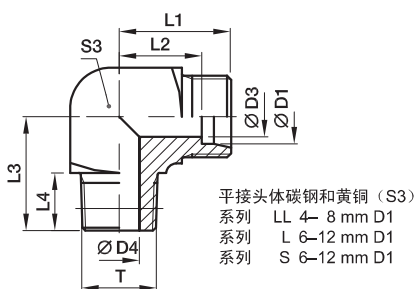

系列	D1	T	D3	D4	L1	L2	L3	L4	L5	S1	S2	S3	重量 克/件	订货号*	工作压力 (bar)		
															CF	71	MS
LL	04	M8×1tap.	3.0	3.5	15	11.0	17	8	21	9	10	9	14	<b>WE04LLM</b>	100	100	63
	06	M10×1tap.	4.5	4.5	15	9.5	17	8	21	9	12	11	17	<b>WE06LLM</b>	100	100	63
	08	M10×1tap.	6.0	6.0	17	11.5	20	8	23	12	14	12	25	<b>WE08LLM</b>	100	100	63
L	06	M10×1tap.	4.0	4.0	19	12.0	20	8	27	12	14	12	29	<b>WE06LM</b>	315	315	200
	08	M12×1.5tap.	6.0	6.0	21	14.0	26	12	29	12	17	14	46	<b>WE08LM</b>	315	315	200
	10	M14×1.5tap.	8.0	7.0	22	15.0	27	12	30	14	19	17	62	<b>WE10LM</b>	315	315	200
	12	M16×1.5tap.	10.0	9.0	24	17.0	28	12	32	17	22	19	89	<b>WE12LM</b>	315	315	200
	15	M18×1.5tap.	12.0	11.0	28	21.0	32	12	36	19	27		78	<b>WE15LM</b>	315	315	200
	18	M22×1.5tap.	15.0	14.0	31	23.0	36	14	40	24	32		148	<b>WE18LM</b>	315	315	200
S	06	M12×1.5tap.	4.0	4.0	23	16.0	26	12	31	12	17	14	53	<b>WE06SM</b>	400	400	250
	08	M14×1.5tap.	5.0	5.0	24	17.0	27	12	32	14	19	17	78	<b>WE08SM</b>	400	400	250
	10	M16×1.5tap.	7.0	7.0	25	17.5	28	12	34	17	22	19	102	<b>WE10SM</b>	400	400	250
	12	M18×1.5tap.	8.0	8.0	29	21.5	28	12	38	17	24	22	134	<b>WE12SM</b>	400	400	250
	14	M20×1.5tap.	10.0	10.0	30	22.0	32	14	40	19	27		99	<b>WE14SM</b>	400	400	
	16	M22×1.5tap.	12.0	12.0	33	24.5	32	14	43	24	30		161	<b>WE16SM</b>	400	400	250

\* 不含螺母及卡套，总成型号及不同密封材料的货号参考D6页。

请根据  
表面处理及  
材料添加后缀

订货号后缀		
材料	表面处理 及材料	示例
碳钢，无六价铬镀锌	CF	WE16SMCFX
不锈钢	71	WE16SM71X
黄铜	MS	WE16SMMSX