


GAI-M 直通内螺纹接头—公制螺纹

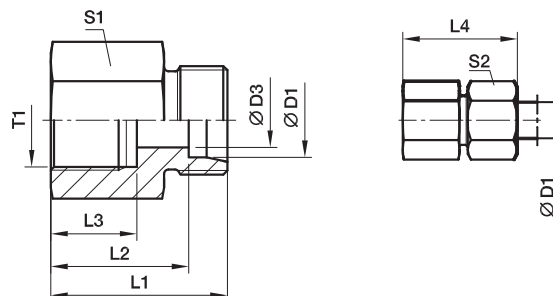

系列	D1	T1	D3	L1	L2	L3	L4	S1	S2	重量 克/件	订货号*	工作压力 (bar)	
												CF	71
L	06	M10×1	4	26.5	19.5	12.5	34	14	14	18	<b>GAI06LM</b>	315	315
	08	M12×1.5	6	31.0	24.0	17.0	39	17	17	32	<b>GAI08LM</b>	315	315
	10	M14×1.5	8	32.0	25.0	17.0	40	19	19	39	<b>GAI10LM</b>	315	315
	12	M16×1.5	10	33.0	26.0	17.0	41	22	22	52	<b>GAI12LM</b>	315	315
	15	M18×1.5	12	35.0	28.0	17.0	43	24	27	68	<b>GAI15LM</b>	315	315
	18	M22×1.5	15	37.0	29.5	19.0	46	30	32	111	<b>GAI18LM</b>	315	315
	22	M26×1.5	19	42.0	34.5	21.0	51	32	36	123	<b>GAI22LM</b>	160	160
	28	M33×2	24	45.0	37.5	24.0	54	41	41	211	<b>GAI28LM</b>	160	160
	35	M42×2	30	51.0	40.5	26.0	62	55	50	459	<b>GAI35LM</b>	160	160
	42	M48×2	36	53.0	42.0	28.0	65	60	60	522	<b>GAI42LM</b>	160	160
S	06	M12×1.5	4	33.0	26.0	17.0	41	17	17	35	<b>GAI06SM</b>	400	400
	08	M14×1.5	5	33.0	26.0	17.0	41	17	19	42	<b>GAI08SM</b>	400	400
	10	M16×1.5	7	34.0	26.5	17.0	43	22	22	58	<b>GAI10SM</b>	400	400
	12	M18×1.5	8	35.0	27.5	17.0	44	24	24	70	<b>GAI12SM</b>	400	400
	14	M20×1.5	10	39.0	31.0	19.0	49	27	27	95	<b>GAI14SM</b>	400	400
	16	M22×1.5	12	39.0	30.5	19.0	49	30	30	114	<b>GAI16SM</b>	400	400
	20	M27×2	16	45.0	34.5	22.0	56	36	36	189	<b>GAI20SM</b>	315	315
	25	M33×2	20	49.0	37.0	24.0	61	41	46	235	<b>GAI25SM</b>	315	315
	30	M42×2	25	55.0	41.5	26.0	68	55	50	490	<b>GAI30SM</b>	315	315
	38	M48×2	32	59.0	43.0	28.0	74	60	60	597	<b>GAI38SM</b>	250	250

\* 不含螺母及卡套，总成型号及不同密封材料的货号参考D6页。

请根据  
表面处理及  
材料添加后缀

订货号后缀		
材料	表面处理 及材料	示例
碳钢，无六价铬镀锌	CF	GAI16SMCFX
不锈钢	71	GAI16SM71X