


765系列

DN 19 钢

DN 19 (3/4") · 流量 100 l/min (22.0 GPM UK). 连接时最大工作压力40MPa · 钢质材料丁腈橡胶密封 · 部分X65系列ISO 16028标准接头可以兼容其他平面的钢质接头。

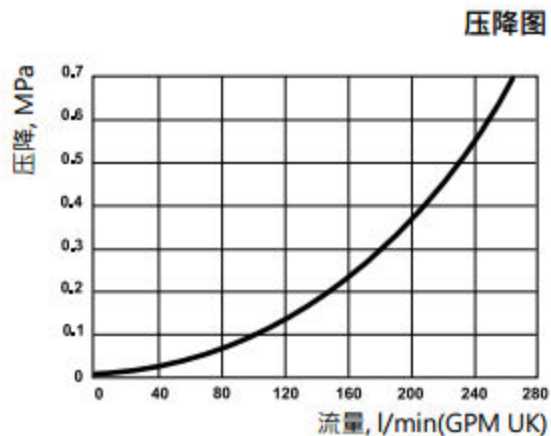

		产品编号	连接	长度	直径	扳手尺寸	密封
母接头	内螺纹	107651103	Rc 1"	99	46	41	NBR
		107651201	G 3/4"	99	46.2	41	NBR
		107651211	G 3/4"	99	46.2	41	FPM
		107651203	G 1"	99	46.2	41	NBR
		107651213	G 1"	99	46.2	41	FPM
		107651403	1" NPT	98.8	46.2	41	NBR
		107651603	1 5/16" -12 ORB	99.8	50.2	45	NBR
		107651281	G 3/4"	99	46.2	41	NBR
推拉式母接头	内螺纹	107651281	G 3/4"	99	46.2	41	NBR
		107656103	Rc 1"	93	46	41	NBR/PUR
		107656201	G 3/4"	93.1	46.2	41	NBR/PUR
		107656211	G 3/4"	93.1	46.2	41	FPM
		107656203	G 1"	93.1	46.2	41	NBR/PUR
		107656213	G 1"	93.1	46.2	41	FPM
		107656403	1" NPT	92.9	46.2	41	NBR/PUR
		107656603	1 5/16" -12 ORB	93.9	50.2	45	NBR/PUR
公接头	内螺纹	107656103	Rc 1"	93	46	41	NBR/PUR
		107656201	G 3/4"	93.1	46.2	41	NBR/PUR
		107656211	G 3/4"	93.1	46.2	41	FPM
		107656203	G 1"	93.1	46.2	41	NBR/PUR
		107656213	G 1"	93.1	46.2	41	FPM
		107656403	1" NPT	92.9	46.2	41	NBR/PUR
		107656603	1 5/16" -12 ORB	93.9	50.2	45	NBR/PUR