



105 SERIES PSH



Manufactured according to ISO 7241-A and ISO 5675 norms.
 Poppet Valve or Ball closing system.
 BSP, NPTF, SAE/ORB threads. Other threads available upon request.

• Materials

Carbon Steel EN -10277-3
 Seals: NBR, Viton or EPDM
 Back-Up-Ring: PTFE
 Balls: AISI 1010/1015
 Springs: Carbon Steel
 DIN 17233/84(B)

• Working temperature (Seals)

	NBR o-rings	Viton o-rings	EPDM o-rings
+	+100°C	+200°C	+150°C
-	-30°C	-10°C	-40°C

• **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC

• **Sectors:** Industrial, Agricultural

• Equivalence


FASTER PV / CPV
 ARGUS SVK
 PARKER 4200



MODEL STRUCTURE

Example;

105.11113 BD

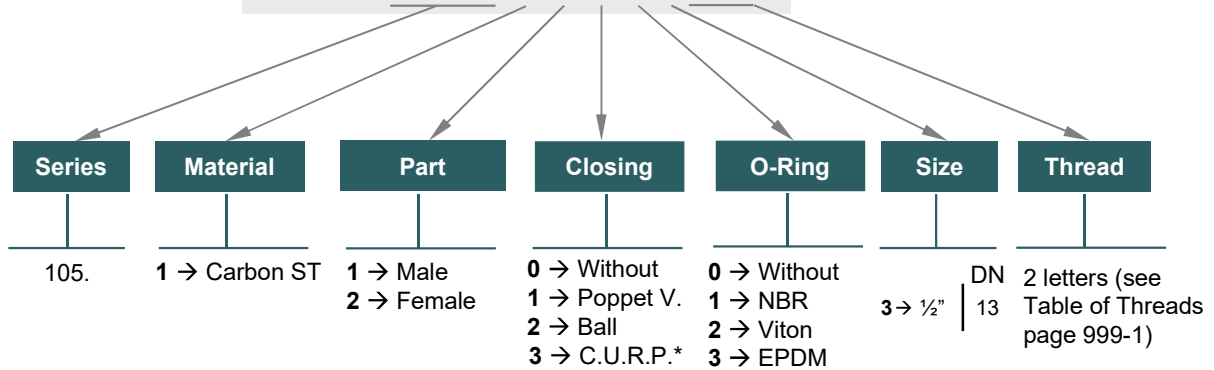

* DN13 available only.

105-1

