

Manufactured according to the requirements of the most important truck manufacurer.

## • Materials

Carbon Steel EN -10277-3,

Seals: NBR, Viton or EPDM

Back-up-ring: PTFE

Balls: *AISI 1010/1015* Springs: *Carbon Steel DIN 17233/84(B)* 

• Applications: Designed for Oil hydraulic Applications according to European Directive 97.23.EC

## • Equivalence


TALLERES ARIZA

• Working temperature (Seals)

NBR	Viton	EPDM
+100°C	+200°C	+150°C
-30°C	-10°C	-40°C

• Sectors: Agricultural, Industrial



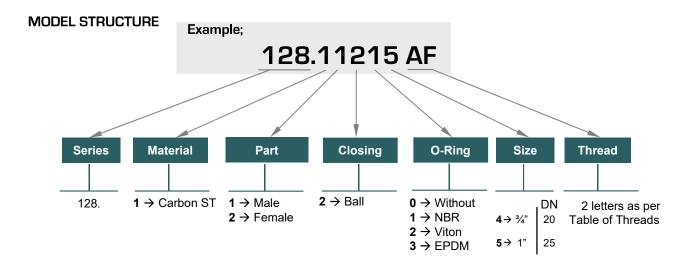

128.



INTEVA S.A. Reserves the right to make modifications in its products without prior notice