



131 SERIES CPR



Manufactured according ISO 16028 norm.
Flat Poppet Valve which avoids fluid leakages during the connection and disconnection.

• Materials

Carbon Steel *EN -10277-3 / AISI 316L*

Seals: NBR. Viton or EPDM

Back-up-ring: PTFE

Balls: *AISI 1010/1015*

Springs: *Carbon Steel DIN 17233/84(B)*

• **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC

• Equivalence

FASTER 2FFI
PARKER FEM
AEROQUIP FD89
SNAP-TITE 74

• Working temperature (Seals)

	NBR	Viton	EPDM
+	+100°C	+200°C	+150°C
-	-30°C	-10°C	-40°C


• **Sectors:** Industrial, Building Machinery



MODEL STRUCTURE

Example;

131.11113 AD

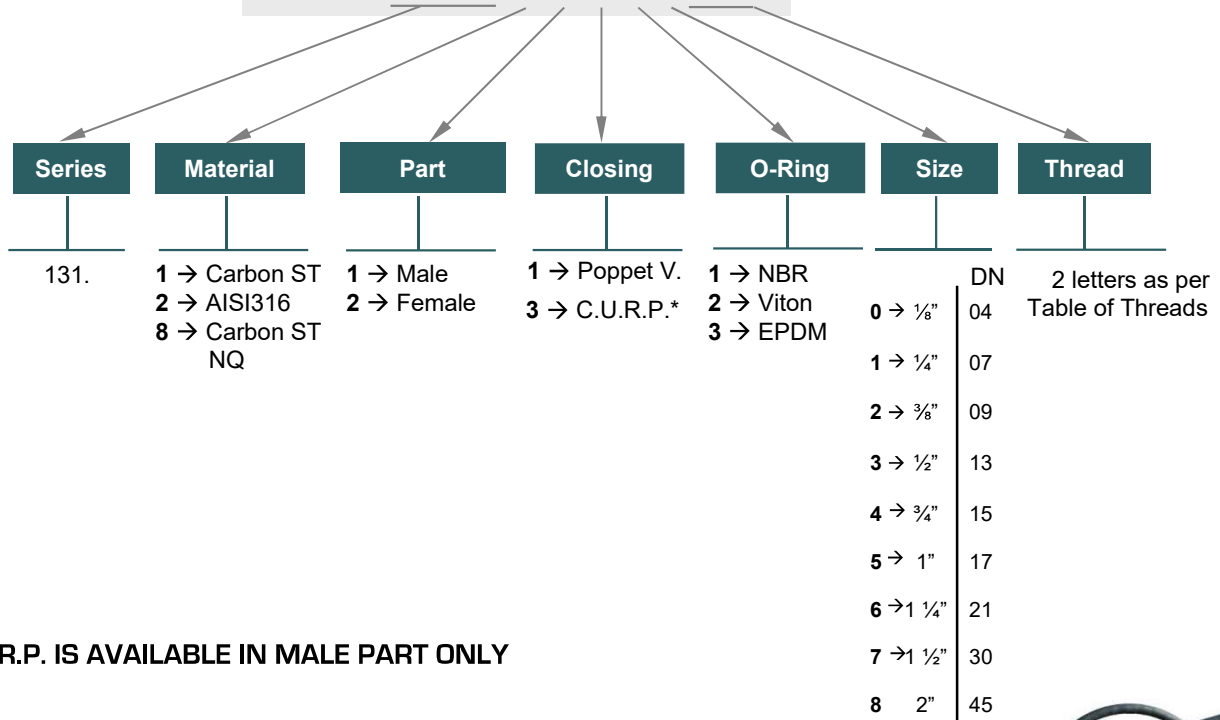

* C.U.R.P. IS AVAILABLE IN MALE PART ONLY

131-1

