

## 190 SERIES

Designed for low working pressure up to 35Bar.
Only available without valve (free-flow)

## • Materials


Brass DIN-EN 12164

Seals: Silicone


Balls: *AISI 316W 14401* Springs: *AISI302 DIN 17224* 

• Applications: Designed for Hot water Applications according to European Directive 97.23.EC Special for American market

• Working temperature (Seals)



• Sectors: Cooling system for moulds

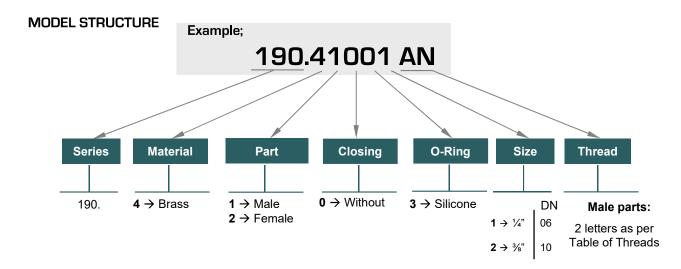

## Female parts:

180°XX

90°XY

