


# STARKLER

## INDUSTRIAL MAINTENANCE

Water/Discharge applications

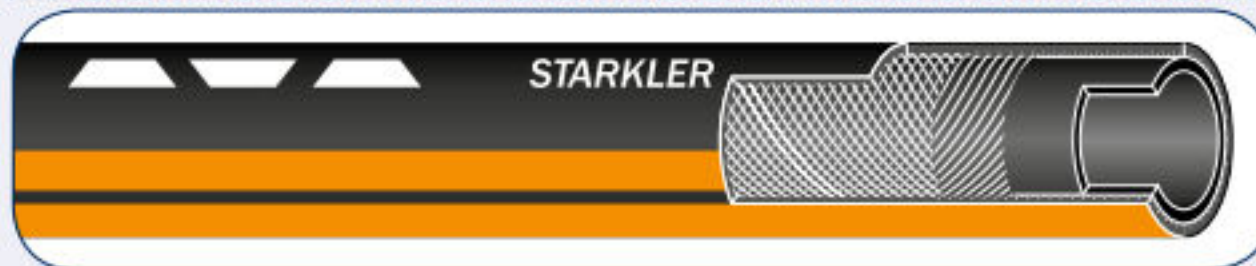

### Applications

A versatile hose for high pressure cleaning operations and general discharge service using hot or cold water and many other fluids (see chemical resistance table for EPDM). Suitable for all sectors: building and public works, industry, agriculture, etc.

### Advantages

- Extremely resistant to ageing and atmospheric conditions.
- Wide range of operating temperatures (- 30 °C to + 100 °C).
- Wide range of diameters.
- Excellent mechanical properties.
- Resistant to many fluids.

- Attractive, well-finished appearance.
- Long service life.

### Technical description

**Inner tube:** EPDM, black, smooth.

**Reinforcement:** synthetic textile.

**Cover:** EPDM, black, smooth for ID 12.7 to 25.4 mm, fabric impression for ID 30 to 100 mm.

**Temperature range:** - 30 °C to + 100 °C.

**Standard/Approval:** in compliance with NF EN ISO 1403 type 2 (except branding).

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes	
<b>12.7</b>	± 0.6	4.00	20.7	± 0.7	20	60	55	0.27	<b>20 - 40 - 80</b>
<b>15.8</b>	± 0.7	4.10	24.0	± 0.8	20	60	70	0.33	<b>20 - 40 - 80</b>
<b>19.4</b>	± 0.7	4.50	28.4	± 0.8	20	60	85	0.43	<b>20 - 40 - 80</b>
<b>25.4</b>	± 1.0	4.80	35.0	± 1.1	20	60	100	0.58	<b>20 - 40 - 80</b>
<b>30.0</b>	± 1.0	4.25	39.0	± 1.0	10	30	240	0.72	<b>20 - 40</b>
<b>32.0</b>	± 1.0	4.25	41.0	± 1.0	10	30	260	0.77	<b>20 - 40</b>
<b>35.0</b>	± 1.0	4.25	44.0	± 1.0	10	30	280	0.83	<b>20 - 40</b>
<b>38.0</b>	± 1.0	4.25	47.0	± 1.0	10	30	310	0.89	20 - 40

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding ID 12.7 to 25.4 mm:



and:



Branding ID 30 to 38 mm:

