


TRELLJET 560/580

INDUSTRIAL MAINTENANCE

High pressure jetting

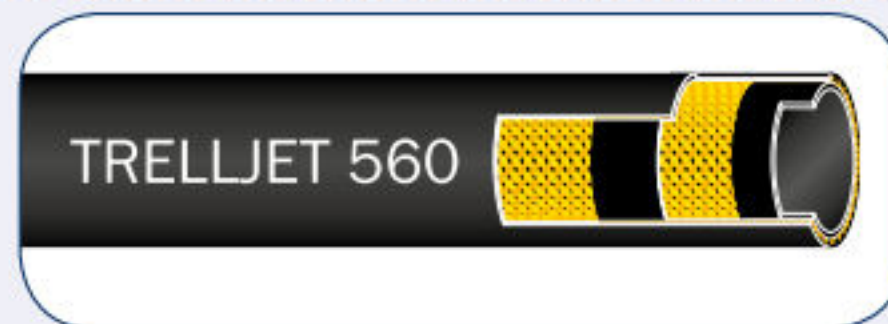

Applications

Specially designed for professional and industrial high pressure cleaning. Efficient for machines, vehicles, floors, public areas, facades, etc. The non-staining cover is also an advantage for use in food industry and public baths. Suitable for mobile pressure washers, fixed installations and reel mounted applications. *TRELLEJET 580: also for the food industry and public baths.*

Advantages

- Smooth cover (non-staining for TRELLEJET 580), oil and detergent resistant, wear and weather resistant.
- High temperature resistance.
- Light weight, flexible and kink resistant.
- Long service life.

Technical description

Inner tube: NBR/SBR, black, smooth.
Reinforcement: steel, two braids.
Cover: SBR/NBR, black (TRELLEJET 560), blue (TRELLEJET 580), smooth.
Temperature range: - 40 °C to + 150 °C.

Couplings/Fittings

Specially designed fittings are available, please contact us for further information in order to get optimum connections.

ND	ID mm	Wall thickness mm	OD mm	Reinforcement diameter mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes
8	7.9	+ 0.6/- 0.2	3.55	15.0 ± 0.7	12.7 ± 0.3	650	1600	65	0.31	100 *
10	9.5	+ 0.6/- 0.2	3.80	17.4 ± 0.7	14.9 ± 0.3	650	1600	70	0.38	100 *
13	12.7	+ 0.8/- 0.4	3.75	20.6 ± 0.8	18.1 ± 0.3	500	1200	70	0.47	100 *

* 50 % of the volume in each delivery will be random lengths, shortest length of 10 m, at least 50 % will be in fixed length mentioned in the table.

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEJET 560 - ND 08 - 5/16" - WP 650 BAR/9560 PSI - MAX 150 °C - 1 Q 13 - Made in France  TRELLEBORG 

TRELLEJET 580 - ND 08 - 5/16" - WP 650 BAR/9560 PSI - MAX 150 °C - 1 Q 13 - Made in France  TRELLEBORG 