


GOLDAIR

INDUSTRIAL MAINTENANCE

Air

GOLDAIR

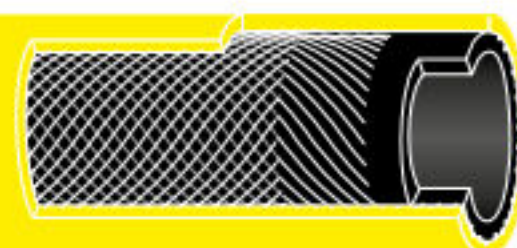

Applications

For all general purpose compressed air applications.
Suitable for high pressure water discharge.

Advantages

- Water and ozone resistant.
- Yellow color allows to spot it easily in dark construction sites.

Technical description

Inner tube: SBR, black, smooth.

Reinforcement: synthetic textile.

Cover: SBR, yellow, smooth.

Temperature range: - 25 °C to + 70 °C.

ID	Wall thickness	OD	Working pressure	Bursting pressure	Bending radius	Weight	Length	Notes
mm	mm	mm	bar	bar	mm	kg/m	m	
10	3.5	17	15	45	60	0.253	40	
13	4.0	21	15	45	78	0.364	40	
19	4.5	28	15	45	115	0.565	40	
25	5.0	35	15	45	150	0.802	40	

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEBORG

GOLDAIR