


KLEGAINE GHYP

INDUSTRIAL MAINTENANCE

Industrial ducting/Elastomer-coated fibre cord

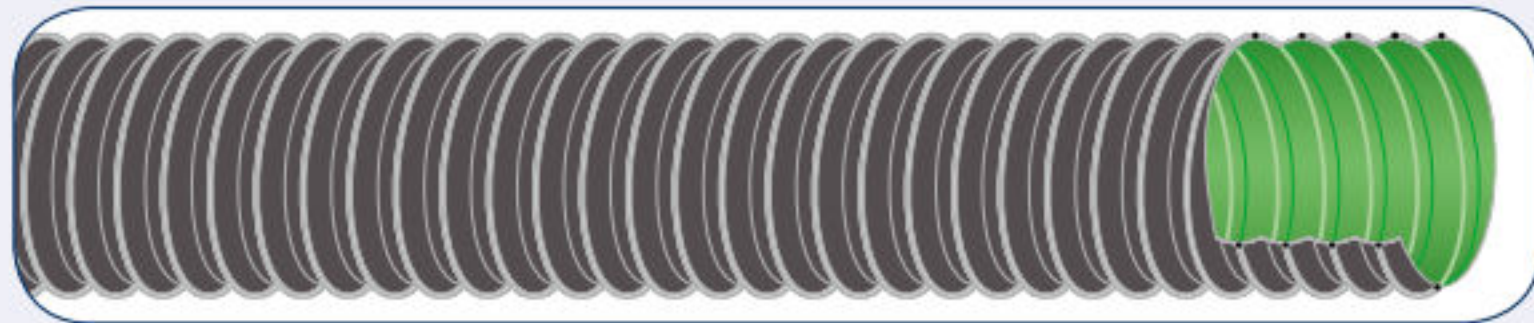

Applications

Ducting for chemical air, gas and dust in any industrial environment.

Advantages

- Good chemical resistance.
- Good heat, ozone and UV resistance.
- Compressible.

For more information, www.trelleborg.com/industrialhose.

Technical description

Hypalon coated-polyester.

Metal clipped helix.

Color: inside green, outside black.

Temperature range: - 40 °C to + 175 °C.

Diameters: from 50 to 1000 mm.

Consult us.