


# KLERIX

## CONSTRUCTION AND ENVIRONMENT

Drain and sewer cleaning

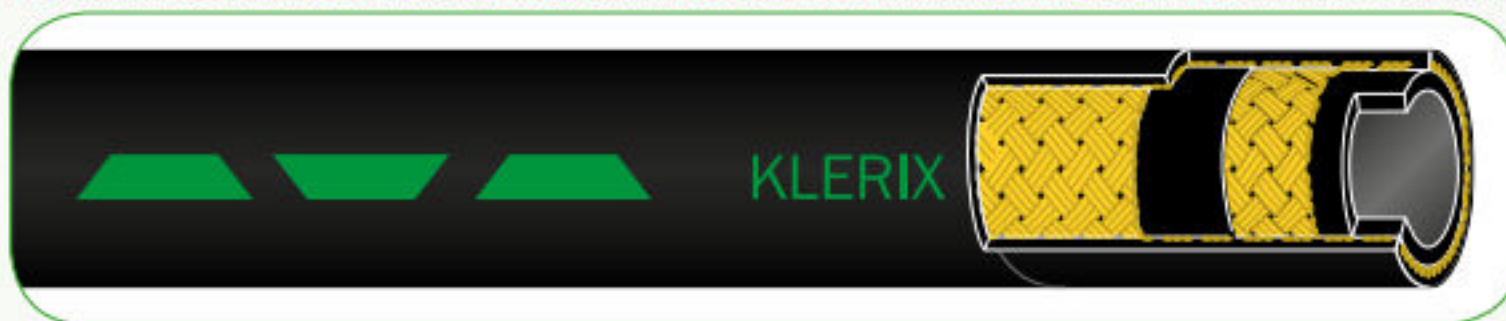

### Applications

For use in sewer cleaning water pressure applications.  
Suitable for replacing hydraulic hoses used in this application.

### Advantages

- Abrasion and weather resistant cover compound.
- Smooth cover, low friction.
- Long lengths.

### Technical description

**Inner tube:** SBR, black, smooth.

**Reinforcement:** steel, braided.

**Cover:** SBR/NR, black, smooth.

**Temperature range:** - 30 °C to + 80 °C.

### Couplings/Fittings

Hydraulic coupling.

### Complementary information

Delivered without couplings.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes	
<b>13.0</b>	± 0.8	5.00	23.0	± 0.8	200	500	70	0.45	<b>40 - 60 - 80 - 100 - 120</b>
<b>19.0</b>	± 0.8	6.25	31.5	± 0.8	200	500	95	0.82	<b>40 - 60 - 80 - 100 - 120</b>
<b>25.0</b>	± 1.0	6.55	38.1	± 1.0	200	500	110	1.14	<b>60 - 80 - 100 - 120</b>
<b>32.0</b>	± 1.2	6.95	45.9	± 1.2	200	500	150	1.57	<b>60 - 80 - 100 - 120</b>

**Length in green = stock item.** Length in black = non stock (consult us for minimum quantity of order).

Embossed branding:



TRELLEBORG

KLERIX - WP 200 BAR - QUARTER YEAR - Made in France