



PERFORMER END-FLEX® COUPLING

Coupling for material handling hoses

CONSTRUCTION & MINING EQUIPMENT

Abrasive materials hydraulic and pneumatic handling

Connection of PERFORMER AD10H, PERFORMER AD10P, PERFORMER AD10T, PERFORMER AR10, PERFORMER CR-EPDM, PERFORMER CD-EPDM.

Advantages

- A leakproof connection with no need for a separate gasket.
- Geometrical continuity of the fluidway ensures full flow without turbulence, localised head loss or premature tube wear.
- The swiveling flange does not come into contact with the material flow.
- Weight saving as END-FLEX® flange systems are lighter than conventional couplings.
- The swiveling flange will accommodate any misalignment of the holes, facilitating fitting and hose rotation.
- END-FLEX® coupling does not reduce the working pressure of the hose.

Technical description

This patented TRELLEBORG system enables PERFORMER hoses to be joined together or connected to flanged ancillary equipment in the pipe line circuit.


Flange assembly:

- a steel ring embedded in a rubber bead which is built, molded and vulcanised along with the hose,
- a steel swiveling flange which locates against the bead and is held in place by the steel ring,
- a rubber gasket integral with the bead, made of the same rubber as the hose tube.

Complementary information

On request, the steel flanges can be:

- chromated galvanised, hot galvanised or resin-coated,
- made of 316L stainless steel,
- built-in two parts,
- with other drillings.

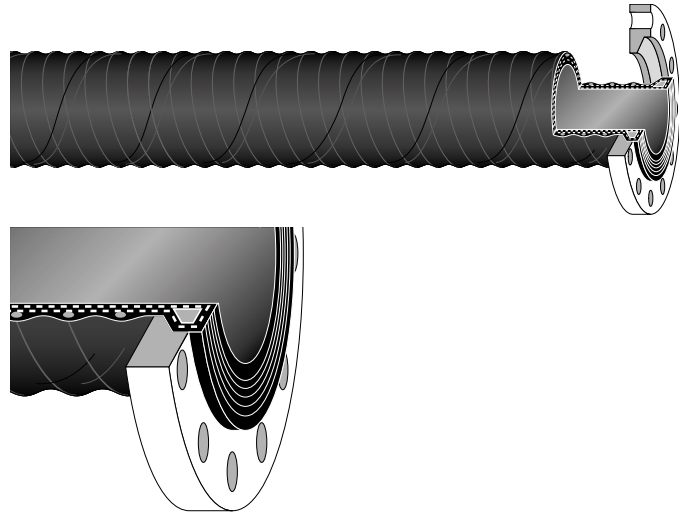

ID hose mm	PN10			PN16			PN20 (ASA150)		
	Drilling ISO tools	Flange OD mm	Flange thickness mm	Drilling ISO tools	Flange OD mm	Flange thickness mm	Drilling ISO tools	Flange OD mm	Flange thickness mm
25	x	115	16	x	115	16	x		
32	x	140	16	x	140	16	x		
40	x	150	16	x	150	16	x		
50	x	165	18	x	165	18	x	152	19
65	x	185	20	x	185	20	x	178	22
75 *	x	200	22	x	200	22	x		
80	x	200	22	x	200	22	x	190	24
100	x	220	22	x	220	22	x	229	24
125	x	250	24	x	250	24	x	254	24
150	x	285	24	x	285	24	x	279	26
175 *	x	315	26	x	315	26	x		
200	x	340	24	x	340	26	x	343	29
225 *	x	370	26	x			x		
250	x	395	26	x	405	32	x	406	30
300	x	445	26	x	460	32	x	483	32
350	x	505	28	x	520	36	x	533	35
400	x	565	32	x	580	38	x	597	36
500	x	670	38						

* Not mentioned in standardised serie covered by ISO 7005.
END-FLEX® flanges are specific for each hose.