

# PLT1 (ISO 16028平面快接)




## TECHNICAL INFORMATION


**Materials:** a wide range of high resistance steels with high stressed components carbonitrided or hardened by induction. Springs in C 98 steel or AISI 302 stainless steel. **Finishing:** all steel parts are zinc-plated and yellow bichromated. Other treatments provided on request. **Seals:** standard in nitrile NBR. On request EPDM, FPM (Viton™) and CR (Neoprene) seals. **Working temperature:** with NBR standard seals - 25°C + 125°C. **Back-up ring:** specially designed in pure Teflon.

## 技术信息

**材料:** 高阻钢与高压硬化的组件弹簧是C98钢或是AISI 302 不锈钢。 **表面加工:** 所有钢体部份为镀锌和镀铬。其他部分依客户要求。 **密封圈:** 丁腈橡胶NBR, 也可依客户要求改为EPDM, FPM或是CR。 **工作温度:** 丁腈橡胶NBR -25°C+125°C。 **支撑圈:** 特设纯铁氟龙。 **国际标准:** ISO 16028

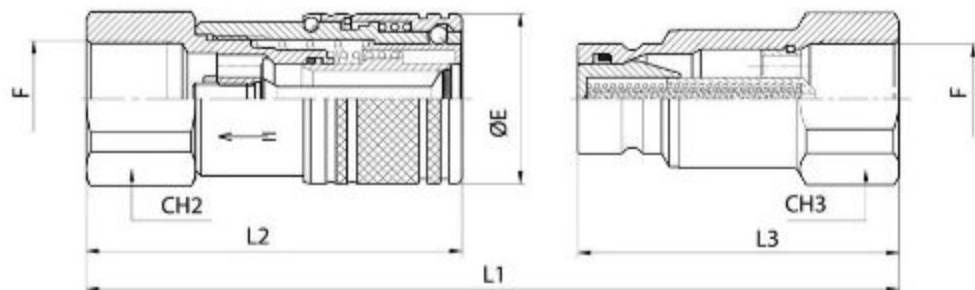

DNP	BG	USA	ISO	CH2	CH3	øE	L1	L2	L3	F	COD. (F)	COD. (M)
06	1	04	6.3	22	22	28	101.5	58.5	53.5	G 1/4 1/4 NPT	PLT1.0606.002 PLT1.0606.012	PLT1.0606.003 PLT1.0606.013
13	2	06	10	27	27	32	116	67.5	63.5	G 3/8 3/8 NPT	PLT1.1310.002 PLT1.1310.012	PLT1.1310.003 PLT1.1310.013
							125	72.5	67.5	G 1/2 1/2 NPT	PLT1.1313.002 PLT1.1313.012	PLT1.1313.003 PLT1.1313.013
20	3	08	12.5	32	32	38	137	84	76	G 1/2 1/2 NPT	PLT1.2013.002 PLT1.2013.012	PLT1.2013.003 PLT1.2013.013
							36	36	38	138.5	78.5	72
25	4	12	19	46	41	48	157.5	94	86	G 3/4 3/4 NPT	PLT1.2519.002 PLT1.2519.012	PLT1.2519.003 PLT1.2519.013
										G 1 1 NPT	PLT1.2525.002 PLT1.2525.012	PLT1.2525.003 PLT1.2525.013
30	5	16	25	50	50	55	177	109.5	90	G 1 1/4 1 1/4 NPT	PLT1.3031.002 PLT1.3031.012	PLT1.3031.003 PLT1.3031.013
										G 1 1/2 1 1/2 NPT	PLT1.3939.002 PLT1.3939.012	PLT1.3939.003 PLT1.3939.013
50	8	32	50	80		103	290	147.5		G 2 2 NPT	PLT1.5051.112 PLT1.5051.012	see PLK4 page 32
										SAE 3000	PLT1.5051.002	

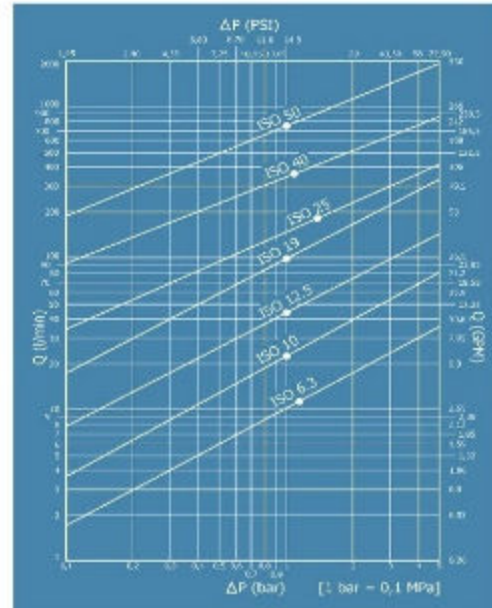

流量图

## 技术参数

规格		最大工作压力	流量	最小爆破压力			液体溢出量	
DNP	BG	DN (mm)	(bar)	(l/min)	公头 (bar)	母头 (bar)	接口 (bar)	(cc)
06	1	6.1	315	12~24	1800	1260	1430	0.008
13	2	8.7	250	23~46	1640	1000	1610	0.010
20	3	11.2	250	45~90	1560	1100	1900	0.012
25	4	15.5	250	100~200	1400	1100	1400	0.020
30	5	18	250	189~280	1300	1000	1400	0.030
39	7	30	250	379~700	1290	1200	1170	0.050
50	8	40	250	757~1000	See PLK4	1000	1000	0.100

## 塑料



标准规格	母头规格	母头长度	母头重量	母头包装	公头规格	公头重量	公头包装	颜色	材料	
DNP	BG	ISO	英寸(母头)	重量(g)	英寸(公头)	重量(g)	英寸(公头)			
06	1	6.3	SPLT.06002	16	50	SPLT.06003	13	100	红	PVC
13	2	10	SPLT.13002	21	50	SPLT.13003	15	100	红	PVC
20	3	12.5	SPLT.20002	29	25	SPLT.20003	26	90	红	PVC
25	4	19	SPLT.25002	51	20	SPLT.25003	41	40	红	PVC
30	5	25	SPLT.30002	87	12	SPLT.30003	64	30	红	PVC