


**Technical data**

Interchange: exclusiv Dnp profile  
 Material: steel and aluminium  
 Finishing: Zn-Fe (Cr III)  
 Threads: BSP – NPT – SAE – METRIC  
 Standard seals: NBR  
 Working temperature: -25 °C +100 °C  
 Optional seals: FKM, EPDM or more  
 Working pressure: 250-350 bar  
 Connection under pressure: allowed (mobile part only)  
 Max residual pressure: working pressure


**技术参数**

互换性: DNP以外均可  
 质: 碳钢和铝  
 表面处理: 镀锌  
 螺纹: BSP-NPT-SAE-公制  
 标准密封圈: NBR  
 工作温度: -25°C+100°C  
 可选密封圈: FKM, EPDM或更多其他  
 工作压力: 250-350bar  
 压力下是否联接: 可以 (仅限于移动零件)  
 最大剩余压力: 工作压力

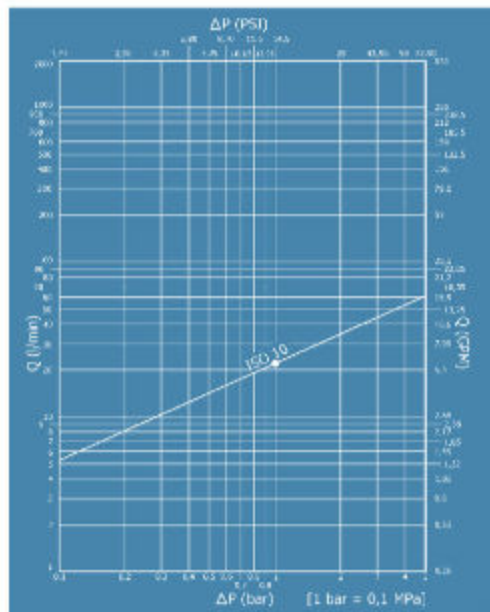


流量图

**PSQ2 DN13 - BG 2 - ISO 10**

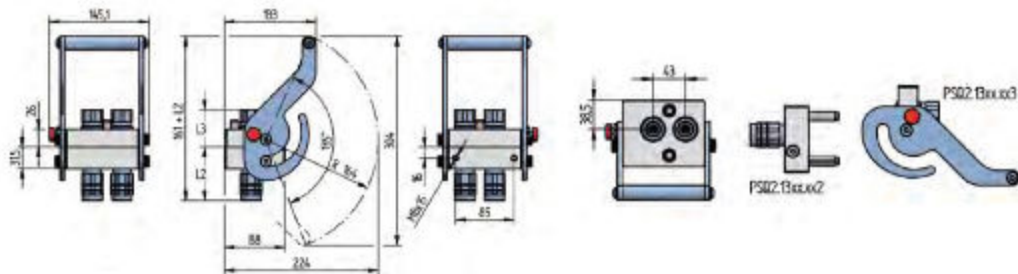

THREADS (螺纹)	L2	L3	L4	F	NORMA (型号)	FIXED PART 固定零件			MOBILE PART 非固定零件		
						COUPLING (F) 接头(母)	PART (F) 零件(母)	Weight (g)重量	COUPLING (M) 接头(公)	PART (M) 零件(公)	Weight (g)重量
IG 1	77,5	54,1		BSP 1/4"	DIN 3852-2-X	POT4.1306.112	PSQ2.1306.002	1410	POT4.1306.113	PSQ2.1306.003	2326
	77,5	54,1		BSP 3/8"	DIN 3852-2-X	POT4.1310.112	PSQ2.1310.002	1390	POT4.1310.113	PSQ2.1310.003	2306
	77,5	57,6		NPT 3/8"	ANSI B1.20.3	POT4.1310.012	PSQ2.1310.012	1400	POT4.1310.013	PSQ2.1310.013	2330
	77,5	54,1		BSP 1/2"	DIN 3852-2-X	POT4.1313.112	PSQ2.1313.002	1360	POT4.1313.113	PSQ2.1313.003	2254
	77,5	58,1		NPT 1/2"	ANSI B1.20.3	POT4.1313.012	PSQ2.1313.012	1370	POT4.1313.013	PSQ2.1313.013	2305
	77,5	54,1		M16x1,5	ISO 6149-1	POT4.1316.102	PSQ2.1316.102	1390	POT4.1316.103	PSQ2.1316.103	2287
77,5	54,1		M18x1,5	ISO 6149-1	POT4.1318.102	PSQ2.1318.102	1380	POT4.1318.103	PSQ2.1318.103	2273	
IG 2	76	55,1		9/16"-18 UNF 2B	SAE J 1926-1	POT4.1315.032	PSQ2.1315.032	1390	POT4.1315.033	PSQ2.1315.033	2293
	77,5	55,1		3/4"-16 UNF 2B	SAE J 1926-1	POT4.1319.032	PSQ2.1319.032	1370	POT4.1319.033	PSQ2.1319.033	2283
	78,5	55,1		M22x1,5	SAE J 2244/1	POT4.1322.102	PSQ2.1322.102	1350	POT4.1322.103	PSQ2.1322.103	2257
AG 5	79	55,1	13	BSP 1/2"	BS 85200	POT4.1313.702	PSQ2.1313.702	1330	POT4.1313.703	PSQ2.1313.703	2235

**PSQ4 DN13 - BG 2 - ISO 10**

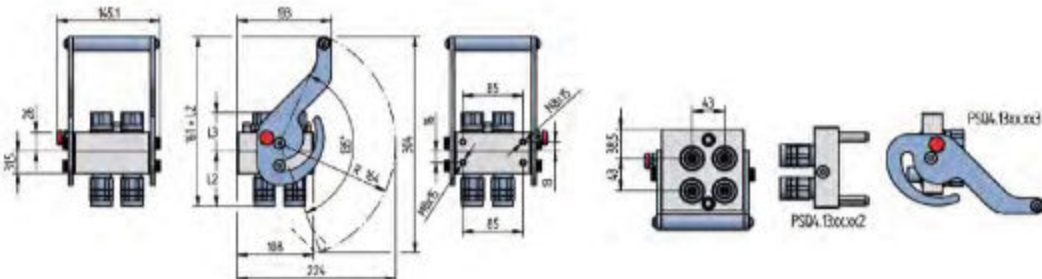

THREADS (螺纹)	L2	L3	L4	F	NORMA (型号)	FIXED PART 固定零件			MOBILE PART 非固定零件		
						COUPLING (F) 接头(母)	PART (F) 零件(母)	Weight (g)重量	COUPLING (M) 接头(公)	PART (M) 零件(公)	Weight (g)重量
IG 1	77,5	54,1		BSP 1/4"	DIN 3852-2-X	POT4.1306.112	PSQ4.1306.002	2040	POT4.1306.113	PSQ4.1306.003	2800
	77,5	54,1		BSP 3/8"	DIN 3852-2-X	POT4.1310.112	PSQ4.1310.002	2000	POT4.1310.113	PSQ4.1310.003	2860
	77,5	57,6		NPT 3/8"	ANSI B1.20.3	POT4.1310.012	PSQ4.1310.012	2000	POT4.1310.013	PSQ4.1310.013	2880
	77,5	54,1		BSP 1/2"	DIN 3852-2-X	POT4.1313.112	PSQ4.1313.002	1940	POT4.1313.113	PSQ4.1313.003	2810
	77,5	58,1		NPT 1/2"	ANSI B1.20.3	POT4.1313.012	PSQ4.1313.012	1950	POT4.1313.013	PSQ4.1313.013	2820
	77,5	54,1		M16x1,5	ISO 6149-1	POT4.1316.102	PSQ4.1316.102	2010	POT4.1316.103	PSQ4.1316.103	2800
77,5	54,1		M18x1,5	ISO 6149-1	POT4.1318.102	PSQ4.1318.102	1980	POT4.1318.103	PSQ4.1318.103	2770	
IG 2	76	55,1		9/16"-18 UNF 2B	SAE J 1926-1	POT4.1315.032	PSQ4.1315.032	2000	POT4.1315.033	PSQ4.1315.033	2810
	77,5	55,1		3/4"-16 UNF 2B	SAE J 1926-1	POT4.1319.032	PSQ4.1319.032	1960	POT4.1319.033	PSQ4.1319.033	2790
	78,5	55,1		M22x1,5	SAE J 2244/1	POT4.1322.102	PSQ4.1322.102	1920	POT4.1322.103	PSQ4.1322.103	2740
AG 5	79	55,1	13	BSP 1/2"	BS 85200	POT4.1313.702	PSQ4.1313.702	1940	POT4.1313.703	PSQ4.1313.703	2810