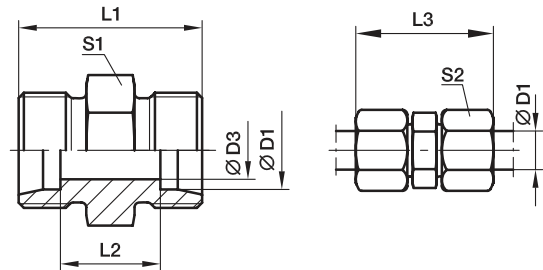


G 直通接头


D

系列	D1 	D3	L1	L2	L3	S1	S2	重量 克/件	订货号*	工作压力 (bar)			
										CF	71	MS	
LL	04	3.0	20	12	31	9	10	5	G04LL	100	100	63	
	06	4.5	20	9	32	11	12	7	G06LL	100	100	63	
	08	6.0	23	12	35	12	14	10	G08LL	100	100	63	
	10	8.0	23	12	35	14	17	13	G10LL	100	100	63	
	12	10.0	23	11	35	17	19	16	G12LL	100	100	63	
L	06	4.0	24	10	39	12	14	12	G06L	500	315	200	
	08	6.0	25	11	40	14	17	16	G08L	500	315	200	
	10	8.0	27	13	42	17	19	23	G10L	500	315	200	
	12	10.0	28	14	43	19	22	28	G12L	400	315	200	
	15	12.0	30	16	46	24	27	51	G15L	400	315	200	
	18	15.0	31	16	48	27	32	69	G18L	400	315	200	
	22	19.0	35	20	52	32	36	90	G22L	250	160	100	
	28	24.0	36	21	54	41	41	137	G28L	250	160	100	
	35	30.0	41	20	63	46	50	214	G35L	250	160	100	
	42	36.0	43	21	66	55	60	296	G42L	250	160	100	
	S	06	4.0	30	16	45	14	17	26	G06S	800	630	400
		08	5.0	32	18	47	17	19	37	G08S	800	630	400
10		7.0	32	17	49	19	22	44	G10S	800	630	400	
12		8.0	34	19	51	22	24	60	G12S	630	630	400	
14		10.0	38	22	57	24	27	77	G14S	630	630	400	
16		12.0	38	21	57	27	30	90	G16S	630	400	250	
20		16.0	44	23	66	32	36	143	G20S	420	400	250	
25		20.0	50	26	74	41	46	251	G25S	420	400	250	
30		25.0	54	27	80	46	50	330	G30S	420	400	250	
38		32.0	61	29	90	55	60	545	G38S	420	315	200	

* 不含螺母及卡套，总成型号及不同的密封材料的货号参考D6页。

请根据
表面处理及
材料添加后缀

订货号后缀		
材料	表面处理 及材料	示例
碳钢, 无六价铬镀锌	CF	G16SCFX
不锈钢	71	G16S71X
黄铜	MS	G16SMSX