


B1 - BSP直管内螺纹-旋转螺母-45°弯接头(60°外锥型)

BS 5200-D, DKR 45°



适用软管类型:

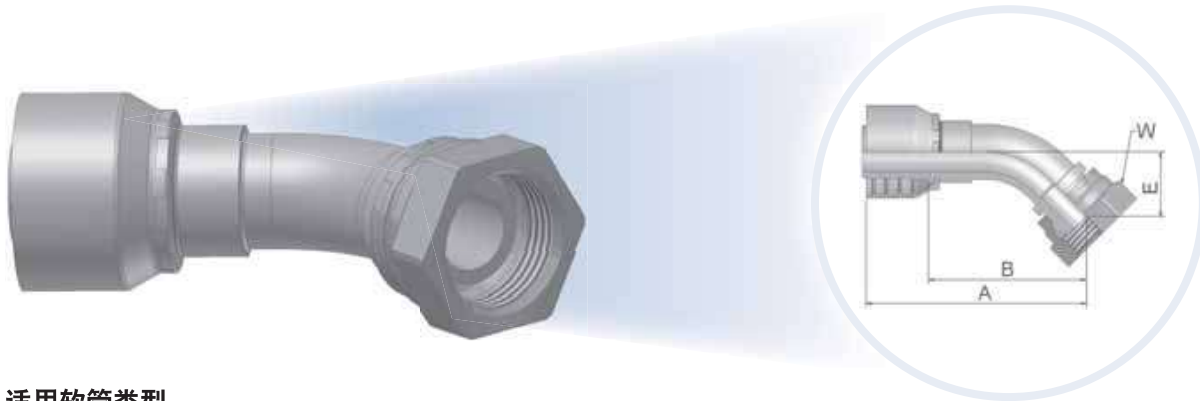

XXXX-XX-XX 型号		软管内径				螺纹 BSP	A	B	E	W
46	43	DN	Inch	Size	mm		mm	mm	mm	mm
1B146-4-4	1B143-4-4	6	1/4	-4	6,3	1/4x19	59	35	16	19
1B146-6-4	1B143-6-4	6	1/4	-4	6,3	3/8x19	59	35	15	22
1B146-6-5	1B143-6-5	8	5/16	-5	7,9	3/8x19	60	36	15	22
1B146-6-6	1B143-6-6	10	3/8	-6	9,5	3/8x19	69	46	17	22
1B146-8-6	1B143-8-6	10	3/8	-6	9,5	1/2x14	63	40	17	27
1B146-6-8	1B143-6-8	12	1/2	-8	12,7	3/8x19	72	49	21	22
1B146-8-8	1B143-8-8	12	1/2	-8	12,7	1/2x14	72	48	20	27
1B146-10-8	1B143-10-8	12	1/2	-8	12,7	5/8x14	69	46	19	30
1B146-10-10	1B143-10-10	16	5/8	-10	15,9	5/8x14	78	53	22	30
1B146-12-10	1B143-12-10	16	5/8	-10	15,9	3/4x14	75	49	21	32
1B146-12-12	1B143-12-12	20	3/4	-12	19,1	3/4x14	87	61	25	32
1B146-16-12	1B143-16-12	20	3/4	-12	19,1	1x11	88	62	26	41
1B146-16-16	1B143-16-16	25	1	-16	25,4	1x11	106	76	31	41
1B146-20-20		32	1-1/4	-20	31,8	1-1/4x11	133	95	35	50
	1B143-20-20	32	1-1/4	-20	31,8	1-1/4x11	139	91	35	50
	1B143-24-24	40	1-1/2	-24	38,1	1-1/2x11	146	108	38	55
	1B143-32-32	50	2	-32	50,8	2x11	190	141	46	70

材料: 碳钢, 镀锌